


High End Surgical Display (47" Medical Grade Display)

- 1920 x 1080P (16:9)
- Maximum Brightness of 500 cd/m²
- Contrast of 1500:1
- RS232C, Push button, IR Remote Controller
- UL/FCC/TUV/CE
- Video Output: D-sub 15 / DVI -D / Component / S-video / AV / HD SDI
- 16.7M Colors

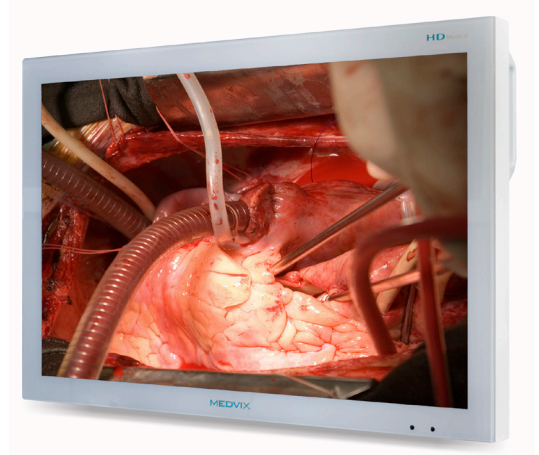

The Medvix AMVXL4708 surgical display has been specifically engineered for surgical and endoscopic applications. Medvix surgical monitors combine unsurpassed clarity, a lightweight design, and include the latest technologies to create a reliable and cost-effective OR/Endo display. High reliability backed by a long term care warranty and competitive pricing make Medvix the superior choice for nearly every medical and surgical display application.

| Picture Performance | |
|---|--|
| LCD Panel | 47.0" TFT LCD Panel |
| Resolution | 1920 x 1080P (16:9) |
| Multimedia | PIP, PAP, Zoom |
| Face Finishing | Protective AR coated glass |
| Colors | 16.7 million colors |
| Viewing Angle (H/V) | +/- 176° (Horizontal), +/- 176° (Vertical) |
| Input/Output | |
| Input | HD-SDI / VGA D-sub / DVI / Component / S-video / AV |
| Output | SDI |
| Horizontal Frequency | 30 ~ 65 KHz |
| Vertical Frequency | 56 ~ 75 Hz |
| Input Resolution | 1920 x 1080P @ 60Hz (Analog) / 1920 x 1080P @ 60Hz (Digital) |
| Brightness | 500 cd/m ² (Typ.) |
| Contrast Ratio | 1500:1 (Typ.) |
| DDC | DDC 2B |
| Power Supply | AC 100V ~ 240V (50 / 60 Hz) |
| Communication Port (Transport protocol) | D-Sub 9 Pin In, RJ45 In/Out (RS-232C In, RS-485 In/Out) |
| General | |
| Operating Temperature | 5°C - 40°C |
| Operating Humidity | 85%RH |
| Dimensions (H x V) | 1139.4mm x 684.4mm x 126.2mm |
| Safety / EMC | UL/FCC/TUV/CE |
| Mass | 85.3 lbs (38.7kg) |